



Scanable sparse antenna array.**TECHNICAL FIELD**

The present invention relates to an antenna array presenting a sparse
5 antenna design, which also provides scanning with reduced grating lobes.

BACKGROUND

The demand for increased capacity in the area covering communication
networks can be solved by the introduction of array antennas. These
10 antennas are arrays of radiating elements that can create one or more
narrow beams in the azimuth plane. A narrow beam is directed or selected
towards the client of interest, which leads to a reduced interference in the
network and thereby increased capacity. In U.S. Patent No. 6,509,881 an
interleaved single aperture simultaneous Rx/Tx antenna is disclosed.

15 A number of simultaneous fixed scanned beams may be generated in the
azimuth plane by means of a Butler matrix connected to the antenna
columns. The antenna element spacing is determined by the maximum scan
angle as the creation of interference lobes due to repeated constructive
20 adding of the phases (also referred to as grating lobes) must be considered.
In order to scan a phased array antenna, the element positions must be
small enough to avoid grating lobes. For an element distance of 1λ the
grating lobe will appear at the edge of the visible space (non-scanning
condition). If the beam then is scanned off boresight, the grating beam will
25 move into the visible space.

Thus, a problem in designing antennas is that the radiating elements in an
array antenna have to be spaced less than one wavelength apart in order not
to generate troublesome grating (secondary) lobes and in the case of a
30 scanned beam, the spacing has to be further reduced. In the limit case when
the main beam is scanned to very large angles (as in the case of an adaptive
antenna for mobile communications base stations), the element separation
needs to be reduced to half a wavelength or less to avoid generation of

grating lobes within visible space. Thus it can as a general rule be established that an antenna array with a fixed lobe should normally have an element distance of less than 1 wavelength while an antenna array with a scanable lobe should normally have an element distance of less than half a wavelength for obtaining a proper scanning angle range.

As disclosed in U.S. Patent No. 6,351,243, radiating elements in an array antenna are often placed in a regular rectangular grid as illustrated in Figure 1. The element spacing is denoted d_x along the x-axis and d_y along the y-axis. The beam directions are found by transforming from element space to beam space. The corresponding beam space for the antenna illustrated in Figure 1 is found in Figure 2.

In this case the main beam is pointing in the direction along the antenna normal. The beams outside the visible space (i.e. outside the unit circle) constitute grating lobes and they do not appear in visible space as long as the beam is not scanned and the element spacing is less than one wavelength along both axes ($\lambda/d_x > 1$ and $\lambda/d_y > 1$). For a large array, the number of radiating elements in the rectangular arranged grid is approximately given by $N_R = A/(d_x d_y)$, where A is the area of the antenna aperture.

When the main beam is scanned along the x-axis, all beams in beam space move in the positive direction by an amount, which equals a function expressed as sinus of the scan (radiating) angle. For each horizontal row in a one-dimensional scan in the x-direction we can express secondary maxima or grating lobes as

$$x_m = \sin(\theta_s) + m \cdot \frac{\lambda}{d_x}, \quad m = \pm 1, \pm 2, \dots$$

wherein x_m is the position of lobe m, θ_s is the scan angle relative to the normal of the array and d_x is the distance between the elements in the horizontal plane. As the distance between lobes here is λ/d_x it will be

realised that the largest element distance for a scan angle producing no grating lobes within the visible region is

$$\frac{d}{\lambda} < \frac{1}{1 + \sin(\theta_{\max})}$$

In a case illustrated in Figure 3, a second beam (grating lobe) enters visible space in addition to the main beam. This may be avoided by reducing the element spacing along the x-axis. When the element spacing is less than half a wavelength (i.e. $\lambda/d_x > 2$), no grating lobe will enter visible space independent of scan angle, since $|\sin(\theta)| \leq 1$.

Radiating elements placed in an equilateral triangular grid are shown in Figure 4. The vertical element spacing is defined as d_y . A corresponding beam space is illustrated in Figure 5. The element spacing must not be greater than $1/\sqrt{3}$ wavelengths (i.e. a maximum value of d_y is about 0.58 wavelengths) along the y-axis (and $2d_x$ is one wavelength along the x-axis [equal to $d_y\sqrt{3} = 0.58\lambda\cdot\sqrt{3} = \lambda$]) to avoid generating grating lobes for any scan angle. Thus the optimum element spacing, d_y , in an equilateral triangular grid of radiating elements is $1/\sqrt{3}$ wavelengths. For a large array, the number of radiating elements in the triangular arranged grid is approximately given by $N_T = A/(2d_x d_y)$. (Also see reference E. D. Sharp mentioned above.) A reduction of $(N_R - N_T)/N_R = 13\%$ is obtainable for the equilateral triangular grid compared to the square grid assuming the same grating lobe free scan volume. ($N_T = 4A/\lambda^2$ and $N_R = 2A\sqrt{3}/\lambda^2$.)

However there is still a demand for an optimisation of the radiating grid in an array antenna for obtaining a scanning sparse antenna array, which provides a further suppressing of grating lobes within visible space.

SUMMARY

The present invention discloses a sparse array antenna comprising series-fed antenna array columns (wave-guides or other types of transmission lines forming columns of radiator elements) tuned to a respective transmit and

receive frequency. Transmitting and receiving radiation elements are formed with an equal distance between each transmitting radiator element and each receiving radiator element being centred on a symmetry line to form a symmetric interleaved transmit/receive array. The receiving array columns will operate as parasitic elements in a transmit mode and the transmitting array columns will operating as parasitic elements in a receive mode and thereby reduce grating lobes entering visual space particularly when scanning the main radiation lobe off from a boresight direction. Generally the distances between each array column in the transmitting array and each array column in the receiving array are increased to be of the order of one wavelength (λ) for forming a sparse array.

SHORT DESCRIPTION OF THE DRAWINGS

The present invention, together with further objects and advantages thereof, may best be understood by making reference to the following description taken together with the accompanying drawings, in which:

FIG. 1 illustrates an antenna having radiating elements placed in a rectangular grid;

FIG. 2 illustrates beam space for an array demonstrated in Figure 1;

FIG. 3 illustrates the beam space for the antenna illustrated in Figure 1 when the main beam is scanned along the x-axis;

FIG. 4 illustrates an antenna having radiating elements in an equilateral triangular grid;

FIG. 5 illustrates the beam space for an equilateral triangular grid with no grating lobes in visible space;

FIG. 6 illustrates a set of wave-guides for Tx and Rx arranged symmetrically around a line through the centre of each wave-guide;

FIG. 7 illustrates radiation pattern for Test wave-guide, Rx-feed, $f=5.671$ GHz;

FIG. 8 illustrates radiation pattern for the Test wave-guide, Rx-feed, $f=5.671$ GHz and Tx antenna element excitations cleared;

FIG. 9 illustrates radiation pattern for the Test wave-guide, Tx-feed, $f=5.538$ GHz;

FIG. 10 illustrates radiation pattern for the Test wave-guide, Tx-feed, $f=5.538$ GHz and Rx antenna element excitations cleared;

FIG. 11 illustrates radiation pattern for four Rx-wave-guides with/without passive, interleaved Tx wave-guides, $f=5.671$ GHz, E-plane, Scan= 0° ;

FIG. 12 illustrates radiation pattern for four Rx-wave-guides with/without passive, interleaved Tx wave-guides, $f=5.671$ GHz, E-plane, Scan= 10° ; and

FIG. 13 illustrates radiation pattern for four Rx-wave-guides with/without passive, interleaved Tx wave-guides, $f=5.671$ GHz, E-plane, Scan= 20° .

DETAILED DESCRIPTION OF THE INVENTION

For describing the present inventive concept a 2 (Rx) + 2 (Tx) wave-guide test model will be described. The goal is then to demonstrate the performance of an interleaved antenna and the correspondence to simulated results. The design of this test model will be described.

The Test model centre frequencies were chosen to be:

$$f_{RX} = 5.671 \text{ GHz}$$

$$f_{TX} = 5.538 \text{ GHz}$$

The slot length and displacement for the slots were calculated using an analysis program for wave-guide slit antennas. The slot length and displacement were set to be equal for all slots within each frequency band function.

The slot parameters were changed and analysed until the input impedance of each wave-guide was matched. The two unexcited wave-guides were also present in the calculation.

The final design parameters are shown below:

$$f_{RX} = 5.671 \text{ GHz} \quad (\text{centre frequency})$$

$$f_{TX} = 5.538 \text{ GHz}$$

$$\lambda_{g_RX} = 82.84 \text{ mm} \quad (\text{guide wavelength})$$

$$\lambda_{g_TX} = 87.99 \text{ mm}$$

$$dx_{RX} = \lambda_{g_RX}/2 = 41.42 \text{ mm} \quad (\text{element distance})$$

$$dx_{TX} = \lambda_{g_TX}/2 = 43.995 \text{ mm}$$

$$dy = 51.26 \text{ mm}$$

(Wave-guide separation within each band, equal for both Rx & Tx arrays)

$$N_{RX}=26 \quad (\text{number of elements/slots within each waveguide})$$

$$N_{TX}=24 \quad (\text{number of elements/slots within each waveguide})$$

$$\text{Slot width } W = 3.00 \text{ mm}$$

The slot data design was made for the active wave-guides fed by equal amplitude and phase. The passive wave-guides (the "other" band) were matched at the feed port.

The slot data obtained are shown in Table I:

Table I Wave-guide slot data

Vgl #	Slot displacement d (mm)	Slot length L (mm)	Calculated wave-guide impedance at centre freq.	Wave-guide height position (mm)	Slot separation along wave-guide (mm)	Rx/Tx - wave-guide
1	0.67	28.90	$0.97 - j0.06$	38.445	41.42	Rx
2	0.67	29.50	$1.01 + j0.04$	12.815	43.995	Tx
3	0.67	28.90	$1.03 + j0.04$	-12.815	41.42	Rx
4	0.67	29.50	$0.97 - j0.07$	-38.445	43.995	Tx

Figure 6 illustrates, in an illustrative embodiment, a set of interleaved wave-guides for transmission and reception. The wave-guides are here arranged symmetrically around a line through the centre of the extension of each wave-guide. Each wave-guide further comprises a number of slots n in each slotted transmitting wave-guide, while each slotted receiving wave-guide may have $n \pm x$ slots, where x then represents an integer digit, (e.g. 0, 1, 2, 3 ...). Such an array may typically be fed by means of active T/R-modules in order to reduce number of modules and consequently reduced cost.

Simulations

The simulated input impedance has been shown for centre frequency in the table above. From these simulations, the excitation ("slot field" amplitude and phase) was also extracted. This was used to calculate the antenna far field for the two main cuts, H- and E-plane. The "non-fed" wave-guides are terminated in a matched load. An antenna element model simulating a slot in a finite ground plane was used.

Figure 7 shows the radiation pattern when the Rx-wave-guides are fed with equal amplitude and phase. The corresponding case but with the Tx-excitations cleared (set equal to 0) is shown in Figure 8. It can be observed that for the two wave-guides alone for Rx, (Figure 7) grating lobes will appear in the

E-plane since the wave-guide distance is close to 1λ . These lobes will be suppressed when the Tx wave-guides are present and parasitically excited, as illustrated in Figure 7.

- 5 The corresponding cases when the Tx wave-guides are fed with equal amplitude and phase are shown in Figure 9 and Figure 10

Simulation of four element scanning array

10 A simulation of a 4+4 element scanning array was also performed. The input impedance and radiation pattern was calculated at the Rx centre frequency, 5.671 GHz for the E-plane scan angles 0° , 10° and 20° . The simulation was made both with and without passive (terminated with a matched load), interleaved Tx wave-guides. The resulting radiation patterns are shown in Figure 11 to Figure 13. The wave-guide parameters are identical to the data
15 shown in Table I above.

In a basic configuration according to the inventive configuration for obtaining a sparse array the inactive wave-guides i.e. receive wave-guides in a transmit operation and vice versa, could be given a favourable phase such that the
20 sidelobe level will be decreased. When the array is scanned to a radiation angle off boresight an improvement will also be obtained by using such a technique and in both cases the array will become sparse compared to the standard case, thus a more simple and cheaper antenna having fewer active modules in an Active Electronically Scanned Array (AESA) achieved.

25

In a more simple version of the inventive configuration inactive elements can, for that particular moment, just serve as dummy elements interleaved between the active element by then being terminated in a suitable way. For instance a suitable shorting device or a matched load positioned at the proper position
30 could then be used.

In a preferred embodiment of this sparse antenna configuration the idea is further based of having several pairs of long serial-fed transmission lines (not necessarily wave-guides) with many radiation elements connected in series and where the distances between the radiation elements of a transmit/receive pair can be somewhat different for the transmitting and receiving radiators, respectively. This will imply that a pair of antenna array columns become tuned to somewhat different frequencies and consequently very little power is coupled between their ports. Such series-fed antenna columns are thus for instance fed from a transmit/receive active module.

In another embodiment of the interleaved antenna array each radiator element of the respective series-fed antenna columns is narrowly tuned within a respective frequency band to thereby further reduce coupling between the transmitting and receiving frequency bands.

In still further embodiment only one set of series-fed columns are actively used, while the remaining set of interleaved set of series-fed columns are terminated by means of a suitable load. This could be used for an entirely tranceive type of operation using a common transmit/receive frequency.

It will be understood by those skilled in the art that various modifications and changes could be made to the present invention without departure from the spirit and scope thereof, which is defined by the appended claims.

10
CLAIMS

1. A sparse array antenna comprising series-fed antenna array columns tuned to a respective transmit and receive frequency, **characterised in** that transmitting and receiving array columns are formed with a given distance between each transmitting radiator element and each receiving radiator element, the series-fed antenna columns being arranged in parallel to each other, thereby forming a symmetric interleaved transmit/receive array;

receiving array columns operate as parasitic elements in a transmit mode and transmitting array columns operate as parasitic elements in a receive mode, thereby reducing creation of grating lobes.

2. The antenna according to claim 1, **characterised in** that a distance between each transmitting antenna array column and each receiving antenna array column is typically increased to be of an order of one wavelength (λ) to thereby obtain a sparse array.

3. The antenna according to claim 2, **characterised in** that the series-fed array columns are formed as extended ridged slotted wave-guides tuned to a respective transmitting and receiving frequency.

4. The antenna according to claim 3, **characterised in** that when having number n of slots in each slotted transmitting wave-guide the number of slots in each slotted receiving wave-guide being generally $n \pm x$, where x represents an integer digit ($x = 0, 1, 2, 3 \dots$).

5. The antenna according to claim 2, **characterised in** that the series-fed array columns are formed as extended transmission lines containing radiation elements, the array columns being tuned to a respective transmitting and receiving frequency.

6. The antenna according to claim 1, **characterised in** that the sparse array antenna is arranged to be scanable to also provide reduced sidelobes entering visual space when scanning the main radiation lobe from an off boresight direction.

5

7. The antenna according to claim 1, **characterised in** that that each one of the series-fed antenna column is narrowly tuned within a respective frequency band to thereby reduce coupling between the transmitting and receiving bands used.



10

8. The antenna according to anyone of the preceding claims, **characterised in** that the series-fed antenna array columns are connected to and fed from an active receive/transmit (T/R) module.

15

9. The antenna according to claim 2, **characterised in** that only one set of series-fed columns being actively used and another interleaved set of series-fed columns are terminated by a suitable load forming parasitic columns of the sparse array antenna.

1/10

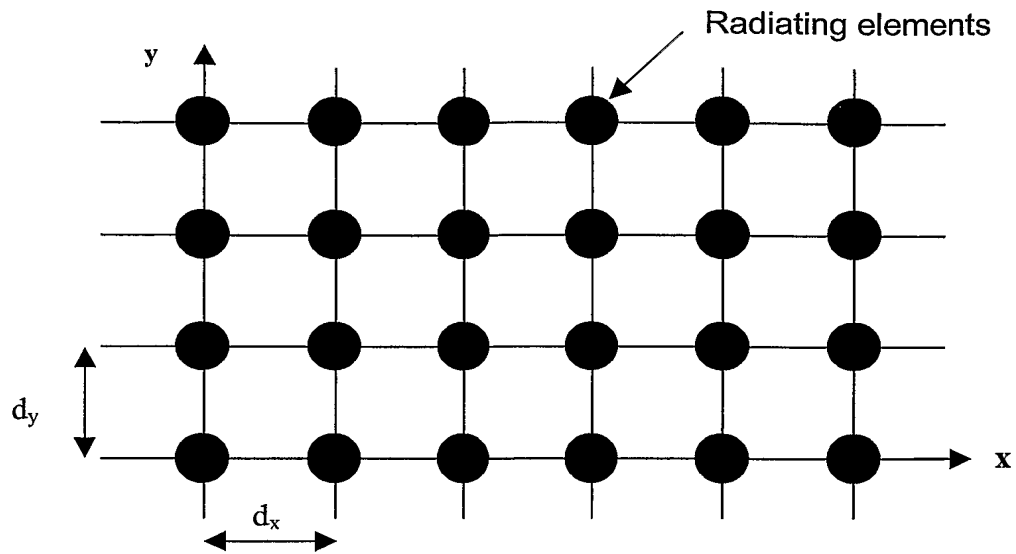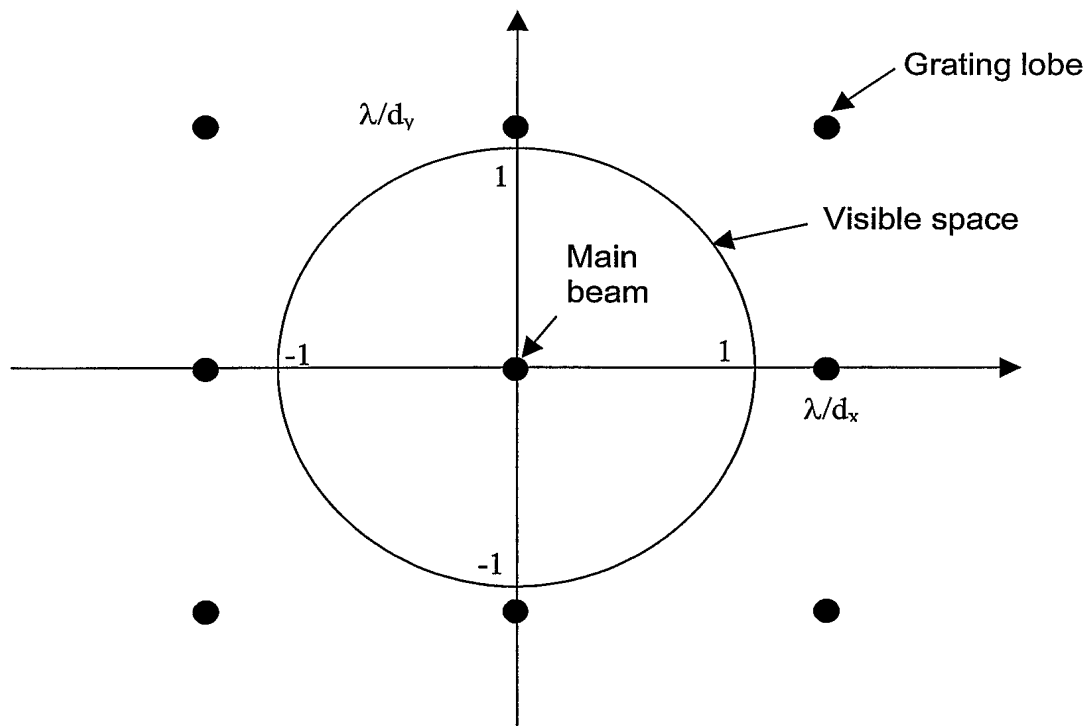**Fig. 1****Fig. 2**

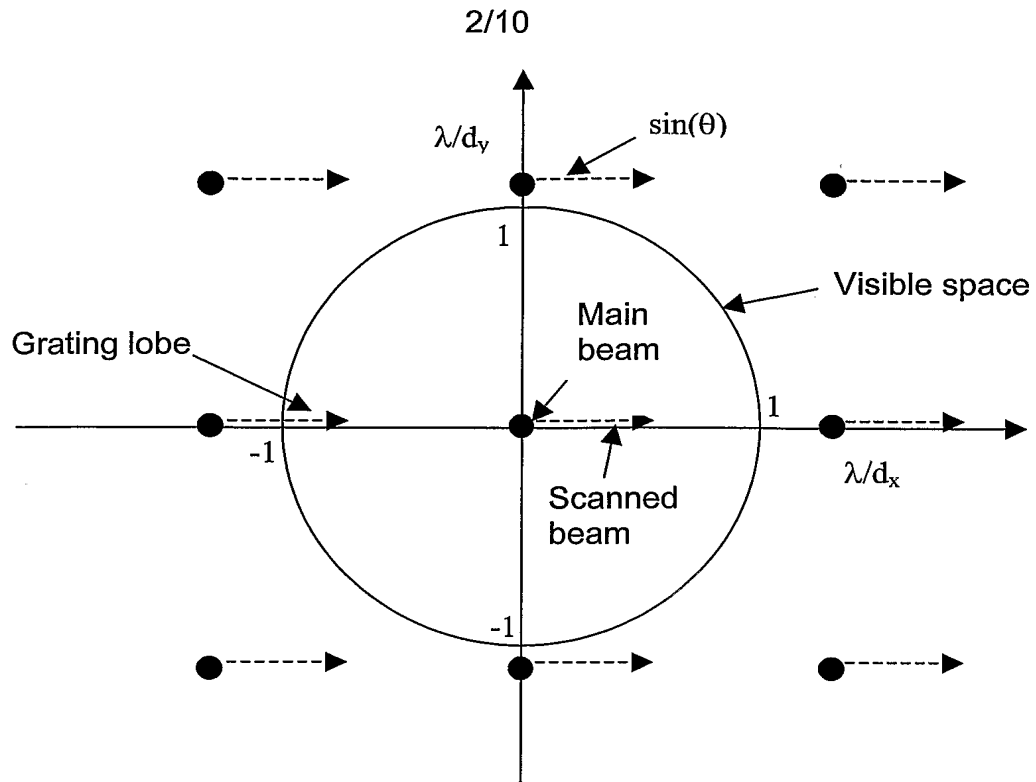


Fig. 3

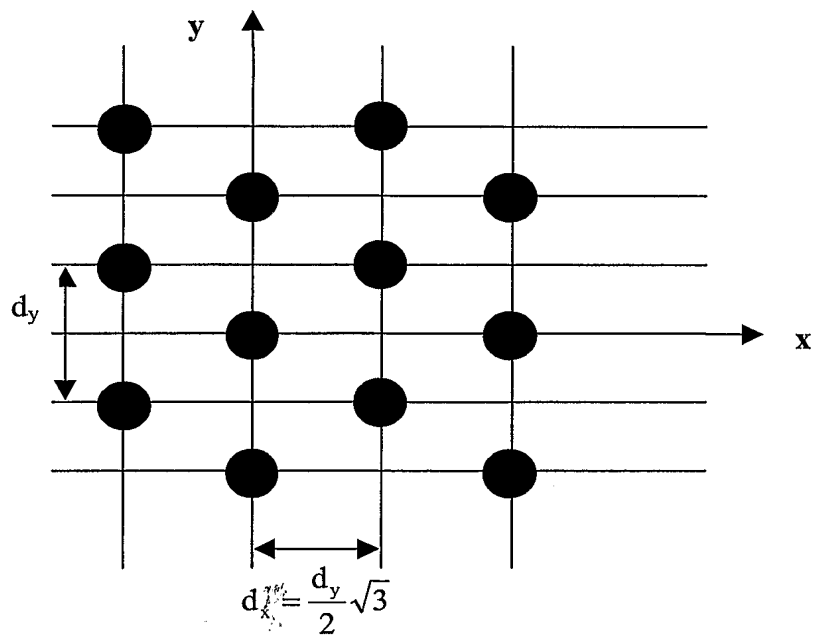


Fig.4

3/10

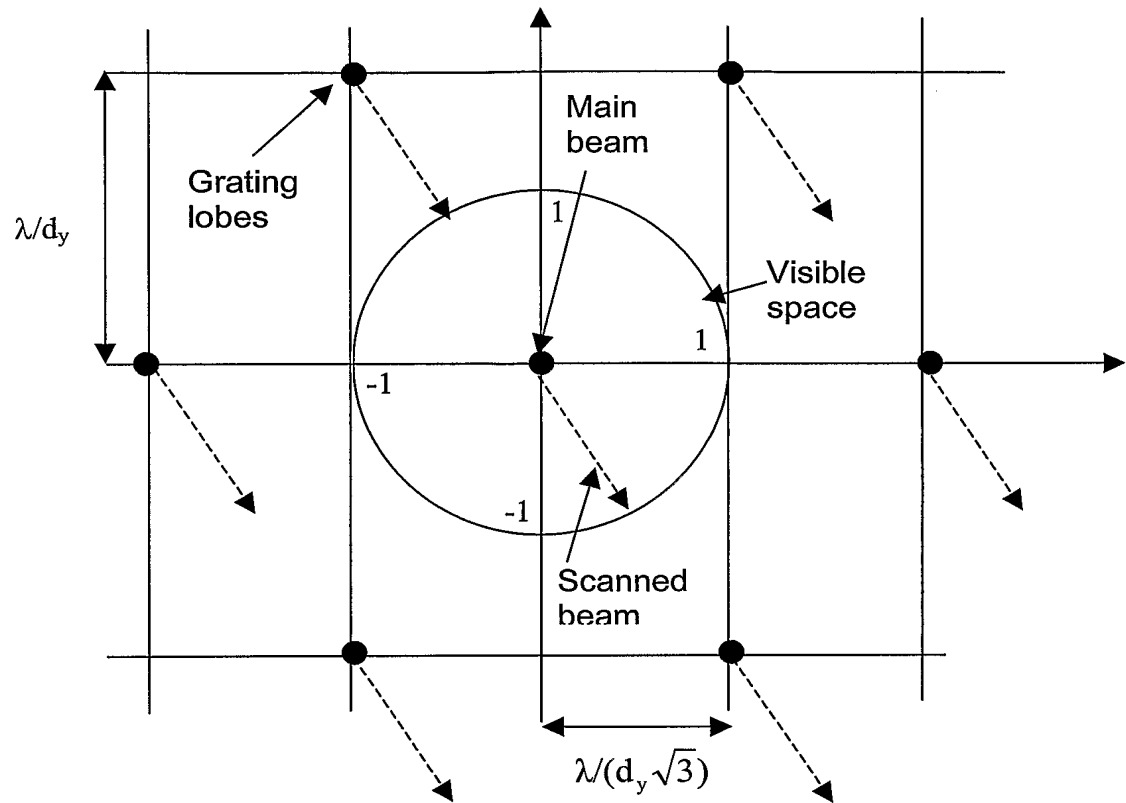


Fig. 5

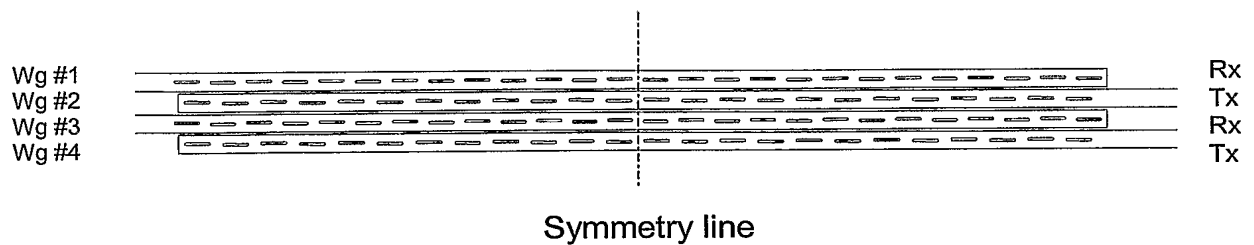
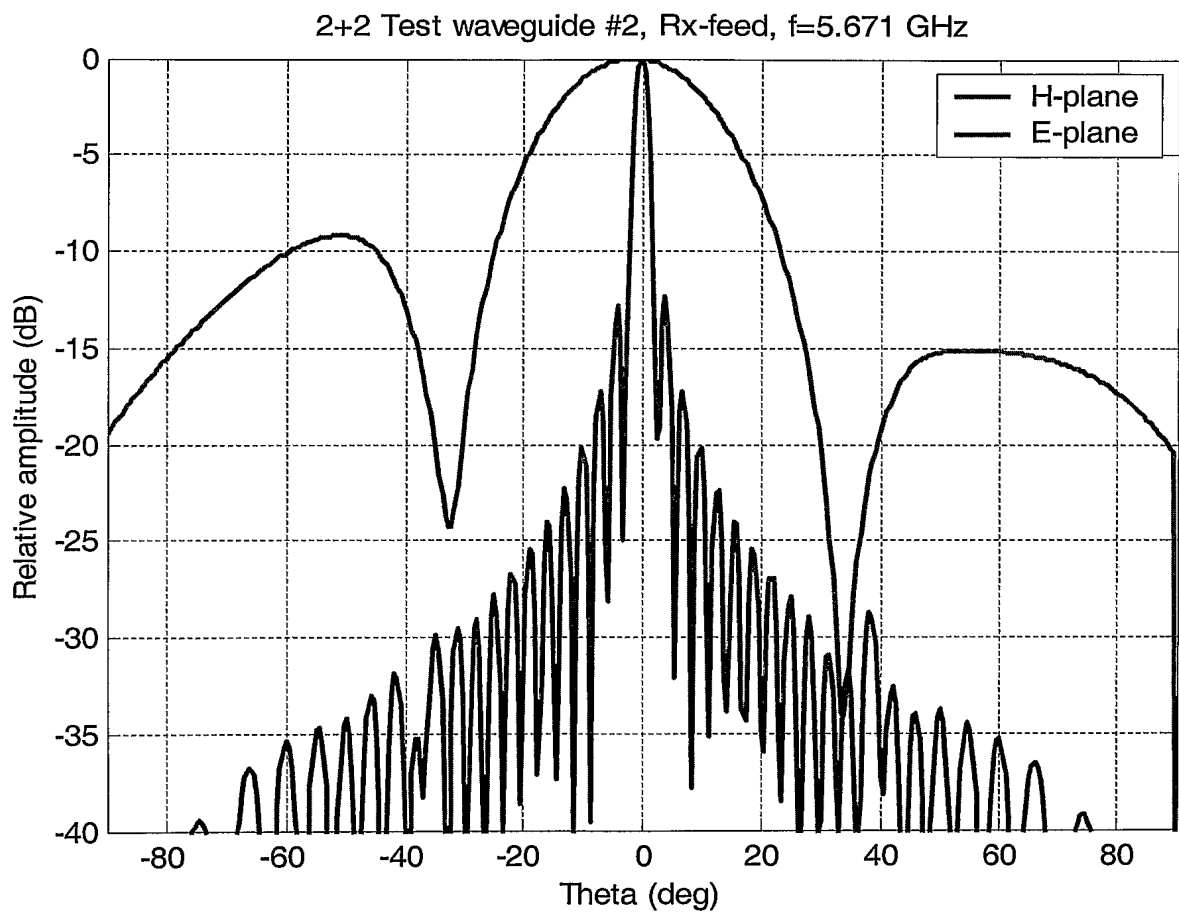
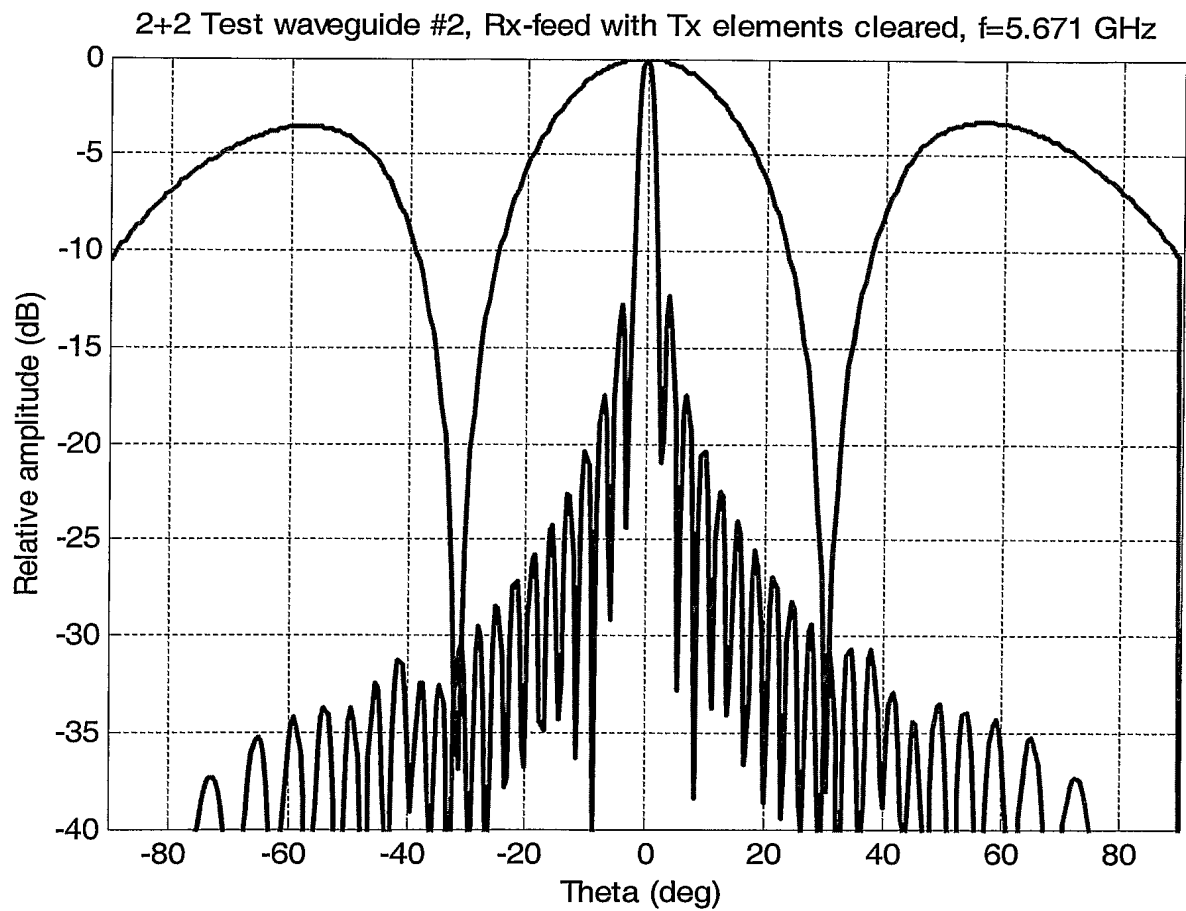


Fig. 6

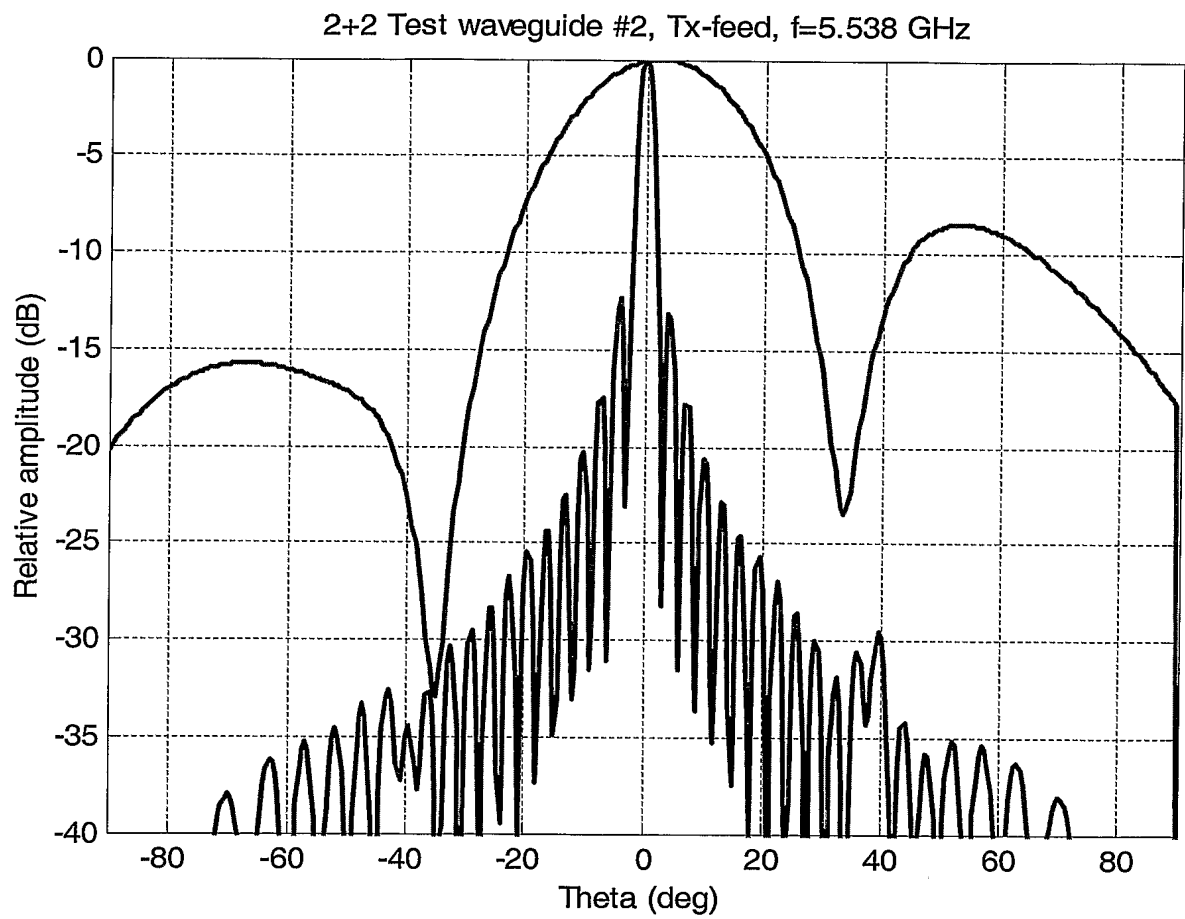
4/10

**Fig. 7**

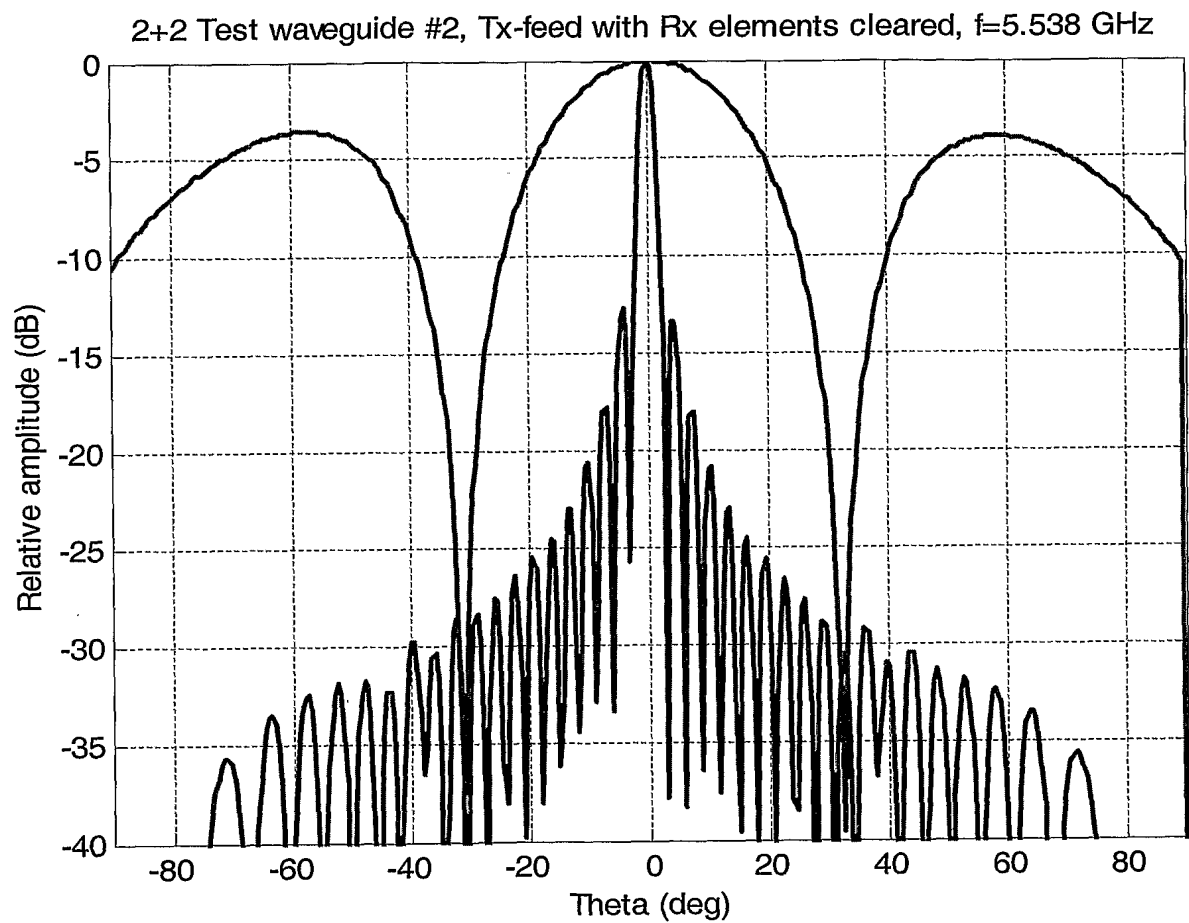
5/10

**Fig. 8**

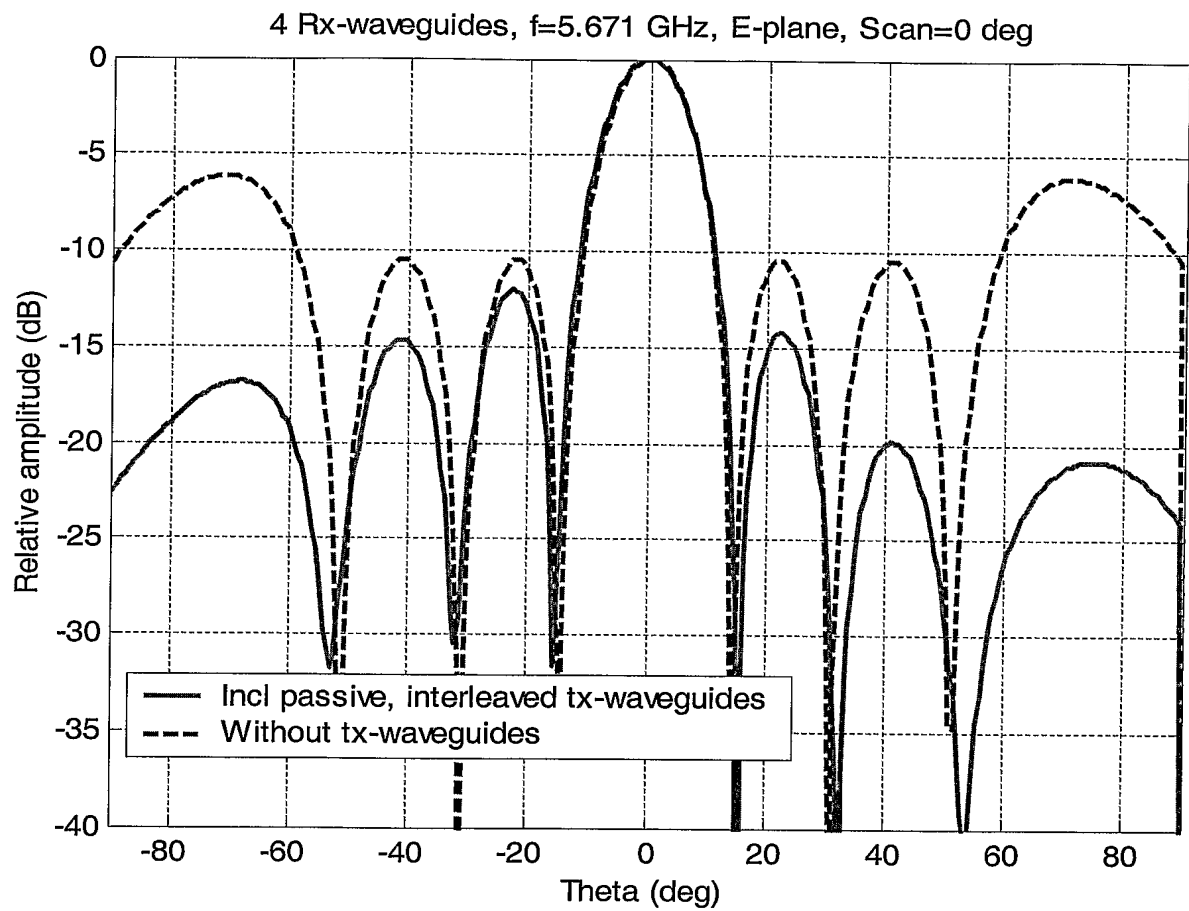
6/10

**Fig. 9**

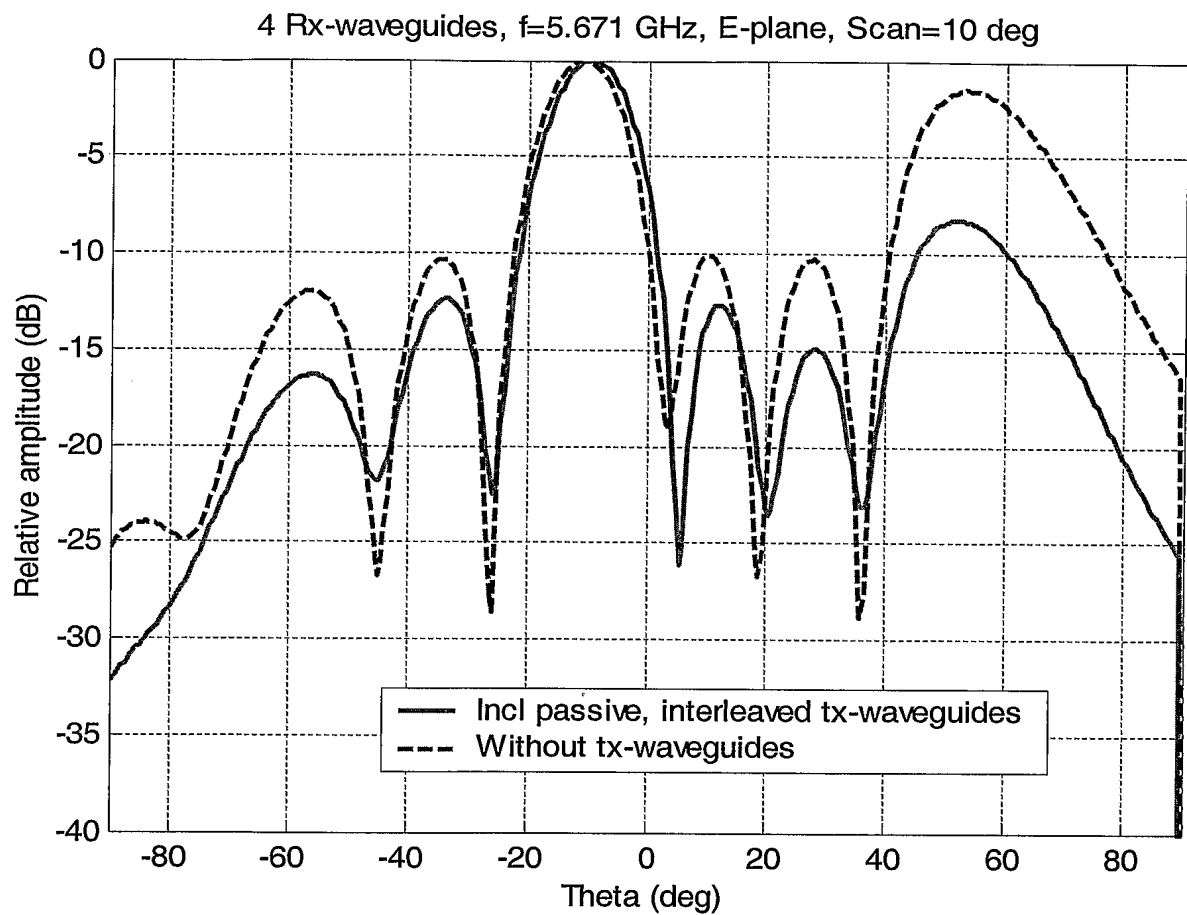
7/10

**Fig. 10**

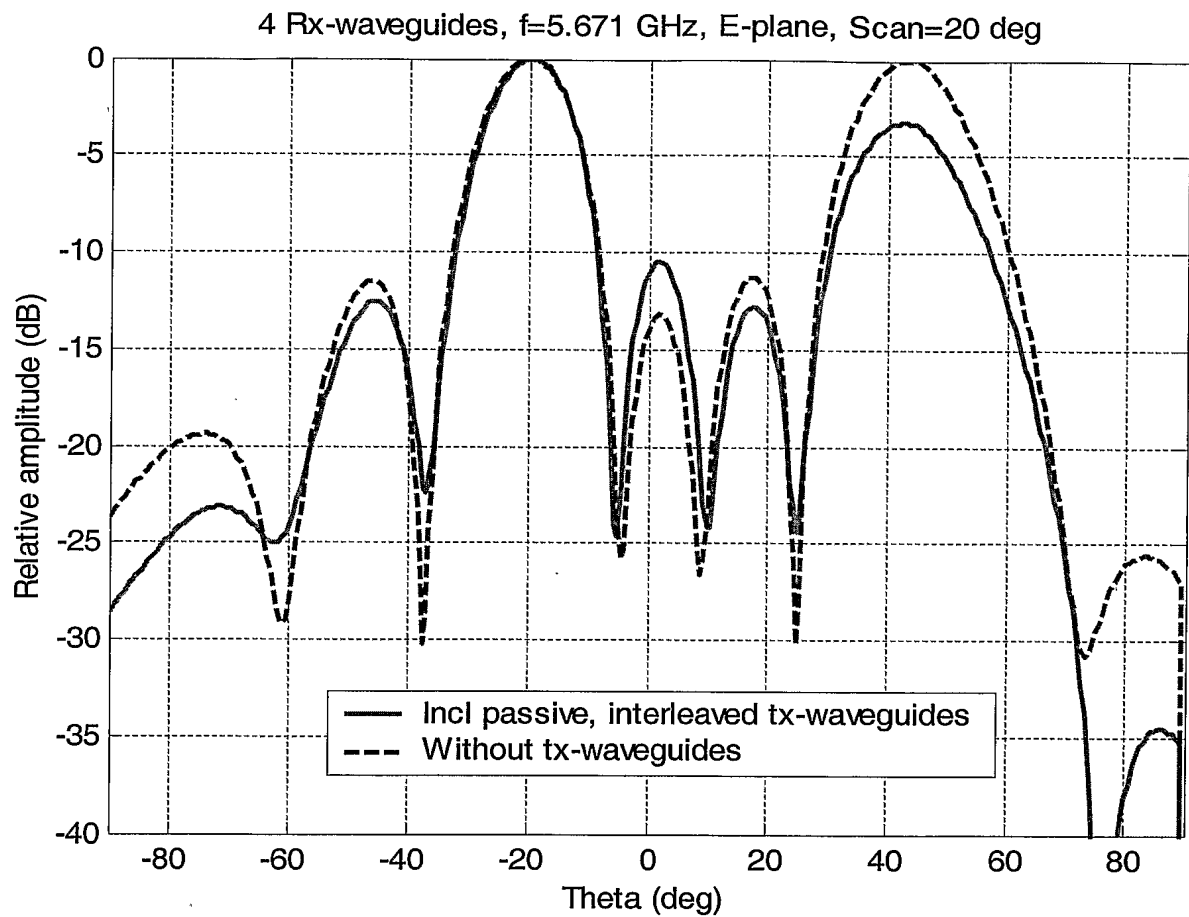
8/10

**Fig. 11**

9/10

**Fig . 12**

10/10

**Fig. 13**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2003/001843

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H01Q 21/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6351243 B1 (ANDERS DERNERYD ET AL), 26 February 2002 (26.02.2002), Cited in the application ---	1-9
A	US 6509881 B2 (KENT OLOF FALK), 21 January 2003 (21.01.2003), Cited in the application -----	1-9

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 May 2004

Date of mailing of the international search report

23-06-2004

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Rune Bengtsson/mj
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

30/04/2004

International application No.

PCT/SE 2003/001843

US	6351243	B1	26/02/2002	AU	7464400	A	10/04/2001
				CN	1373918	T	09/10/2002
				JP	2003509885	T	11/03/2003
				SE	518207	C	10/09/2002
				SE	9903239	A	11/03/2001
				WO	0118912	A	15/03/2001

US	6509881	B2	21/01/2003	AU	2565701	A	03/07/2001
				AU	6649001	A	21/01/2002
				DE	10085295	T	12/12/2002
				EP	1319261	A	18/06/2003
				GB	0216644	D	00/00/0000
				GB	2377058	A	31/12/2002
				SE	516841	C	12/03/2002
				SE	0002602	A	11/01/2002
				US	2002003502	A	10/01/2002
				WO	0205386	A	17/01/2002